



Construction characteristics

End covers	hard anodised aluminum
Barrel	anodised aluminium (brass for Ø8 and Ø10)
Piston rod	non magnetic piston : Ø8 - Ø10: stainless steel / Ø12 - Ø50: C43 chromed magnetic piston: Ø10 - 20: stainless steel / Ø25 - 50: C43 chromed
Piston	aluminium
Seals	Standard: NBR Oil resistant rubber, PUR Piston rod seals (HNBR or FPM seals available upon request)
Mounting	steel painted in cathoporesis
Forks	cadmium plated steel
Single-acting springs	steel for springs and stainless steel
Cushioning length	∅ 16 - 20 - 25 - 32 - 40 - 50 mm 15 - 18 - 18 - 18 - 22 - 22

Technical characteristics

Fluid	filtered air, preferably lubricated
Max. pressure	10 bar
Working temperature	-5°C - +70°C with standard seals magnetic or non magnetic piston -5°C - +80°C with FPM seals magnetic piston -5°C - +80°C with HNBR seals magnetic piston -5°C - +120°C with HNBR seals non magnetic piston -5°C - +150°C with FPM seals non magnetic piston

Please follow the suggestions below to ensure a long life for these cylinders:

- use clean and lubricated air
- correct alignment during assembly with regard to the applied load so as to avoid radial components or bending the rod.
- avoid high speeds together with long strokes and heavy loads: this would produce kinetic energy which the cylinder cannot absorb, especially if used as a limit stop (in this case use mechanical stop device)
- evaluate the environmental characteristics of cylinder used (high temperature, hard atmosphere, dust, humidity etc.)

Please note: air must be dried for applications with lower temperature.

Use hydraulic oils H class (ISO Vg32) for correct continued lubrication.

Our Technical Department will be glad to help.

Standard strokes

Ø8 - Ø10 :

15 - 25 - 50 - 75 - 80 - 100 mm

Ø12 - Ø16 :

15 - 25 - 50 - 75 - 80 - 100 - 150 - 160 - 200 - 250 - 300 mm

Ø20 - Ø25 :

15 - 25 - 50 - 75 - 80 - 100 - 150 - 160 - 200 - 250 - 300 - 320 - 350 - 400 mm

Ø32 - Ø50 :

15 - 25 - 50 - 75 - 80 - 100 - 150 - 160 - 200 - 250 - 300 - 320 - 350 - 400 - 450 - 500 mm


For higher strokes, the length does not increase proportionally to the stroke, and allowance must be made for adequate spring allocation

Minimum and maximum springs load

Bore	Ø12 - Ø20	Ø25	Ø32	Ø40 - Ø50
Min. load(N)	10	10	20	40
Max. load(N)	25	50	55	110

Basic version


Ordering code	Description
1260.Ø.stroke	Basic
1271.Ø.stroke	Basic front spring from ø 12 (max stroke 40 mm)
1272.Ø.stroke	Basic rear spring from ø 12 (max stroke 40 mm)
12--.Ø.stroke.A	Adjustable cushions (from Ø16)
12--.Ø.stroke.M	Magnetic piston (from Ø10)
12--.Ø.stroke.X	Stainless steel rod
12--.Ø.stroke.A.M	Cushioned with magnetic piston
12--.Ø.stroke.A.M.X	Cushioned, magnetic piston and stainless steel rod
12--.Ø.stroke. . . .T	HNBR seals version
12--.Ø.stroke. . . .V	FPM seals version

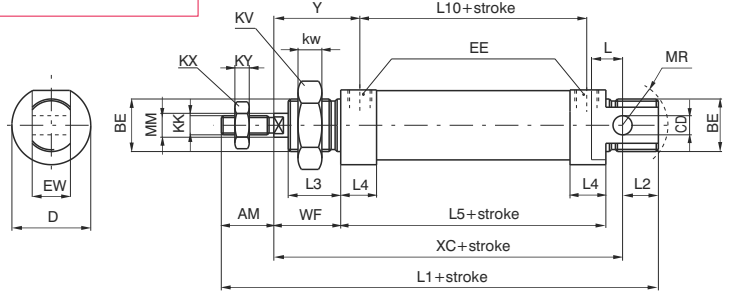

Standard execution, fully complying with ISO standards from ø 8 to ø 25. Diameters 32, 40 and 50 not included in the standard, comply with our own specifications. Can use all available mountings. For single acting type, the maximum stroke is 40 mm., after which overall dimensions increase in length to an extent not proportional to the stroke (and in any case not longer than stroke 100).

Without rear eye version


Ordering code	Description
1261.Ø.stroke	Without rear eye
1273.Ø.stroke	Without rear eye front spring from ø 12 (max stroke 40 mm)
1274.Ø.stroke	Without rear eye rear spring from ø 12 (max stroke 40 mm)
12--.Ø.stroke.A	Without rear eye adjustable cushions (from Ø16)
12--.Ø.stroke.M	Without rear eye magnetic piston (from Ø10)
12--.Ø.stroke.X	Without rear eye stainless steel rod
12--.Ø.stroke.A.M	Cushioned with magnetic piston
12--.Ø.stroke.A.M.X	Cushioned, magnetic piston and stainless steel rod
12--.Ø.stroke. . . .T	HNBR seals version
12--.Ø.stroke. . . .V	FPM seals version
12--.Ø.stroke. . . .L	Air inlet at 90° version

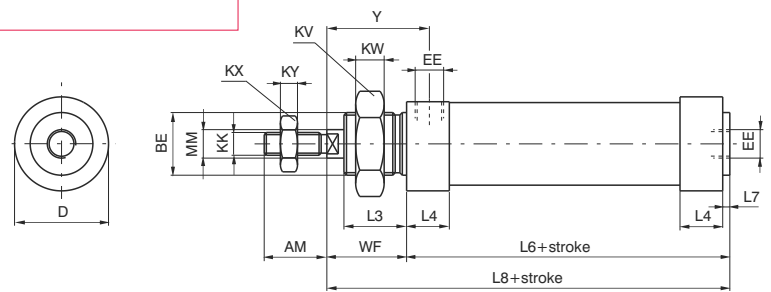

Version derived from standard execution 1260 and not included in ISO standard. Not having a rear eye it is shorter and the air inlet is from the rear or at 90° like it is on the front. The considerations made for the basic type 1260 apply for all single-acting types.

Push/Pull rod version

Ordering code	Description
1262.Ø.stroke	Push/pull rod
1262.Ø.stroke.A	Adjustable cushions (from Ø16)
1262.Ø.stroke.M	Magnetic piston (from Ø10)
1262.Ø.stroke.X	Stainless steel chromed rod
1262.Ø.stroke.E	Hexagon rod (from Ø12)
1262.Ø.stroke.A.M	Cushioned with magnetic piston
1262.Ø.stroke.A.M.X	Cushioned, magnetic piston and stainless steel rod
1262.Ø.stroke. . . .T	HNBR seals version ★
1262.Ø.stroke. . . .V	FPM seals version ★

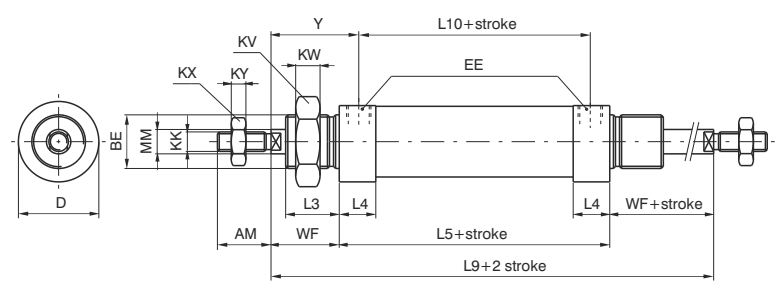

Execution by rod coming out from both end plates, with overall dimensions, except for the rod, equal to 1260 version. Not available with Ø8 and 10).

★ Excludes hexagonal thread version

4

Non rotating hexagonal rod

Ordering code	Description
1260.Ø.stroke.E	Non rotating hexagonal rod from Ø12
1271.Ø.stroke.E	Non rotating hexagonal rod front spring from Ø12 (max stroke 40 mm.)
1272.Ø.stroke.E	Non rotating hexagonal rod rear spring from Ø12 (max stroke 40 mm.)
12- -Ø.stroke.E.M	Non rotating hexagonal rod magnetic piston (from Ø12)
12- -Ø.stroke.E.X	Non rotating hexagonal stainless steel chromed rod



Similar overall dimensions as 1260 basic type, it differs because of the hexagonal rod (instead of circular) to avoid the rotation. It is particularly suitable when it is used as a guide and support to the linked element. Not for use with high frequencies and long strokes. For which, whenever possible use front spring.

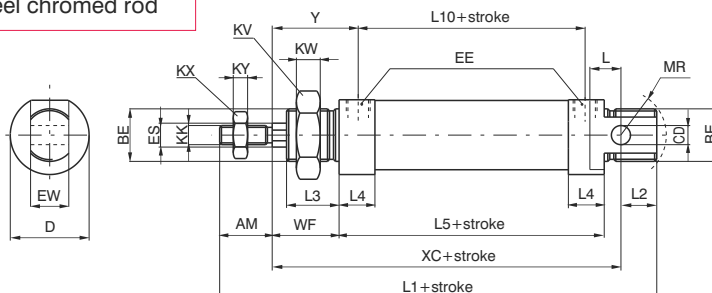


Table of dimensions

Bore	8	10	12	16	20	25	32	40	50
AM (-0,2)	12	12	16	16	20	22	20	25	25
BE	M12x1,25	M12x1,25	M16x1,5	M16x1,5	M22x1,5	M22x1,5	M30x1,5	M40x1,5	M40x1,5
CD (H9)	4	4	6	4	8	8	12	14	14
D (-0,3)	16	17	19	24	28	33	40	48	58
EE	M5	M5	M5	M5	G1/8"	G1/8"	G1/8"	G1/4"	G1/4"
ES	-	-	6	6	8	10	12	12	12
EW (d13)	8	8	12	12	16	16	26	30	30
KK (6g)	M4x0,7	M4x0,7	M6x1	M6x1	M8x1,25	M10x1,5	M10x1,25	M12x1,75	M12x1,75
KV	17	17	22	22	30	30	42	52	52
KW	5,5	5,5	6	6	7	7	8	9	9
KX	7	7	10	10	13	17	17	19	19
KY	3	3	4	4	5	6	6	7	7
L	6	6	9	9	12	13	13	16	16
L1(±1) *	85	85	105	111	130	141	139	164	167
L2	9	9	14	13	15	15	14	16	16
L3	11	11	17	17	18	22	22	25	25
L4	10	10	9,5	10,5	15	15	15	18	18
L5 (±1) *	46	46	50	56	68	69	69	79	82
L6 (±1) *	48	48	52	58	70,5	71,5	71,5	82	85
L7	2	2	2	2	2,5	2,5	2,5	3	3
L8 (±1) *	64	64	74	80	94,5	99,5	99,5	117	120
L9 (±1,2) *	78	78	94	100	116	125	125	149	152
L10 (±1) *	35	35	40	45	52	53	53	60	63
MM (f7)	4	4	6	6	8	10	12	14	14
MR (min.)	12	12	16	16	18	19	22	28	28
WF (±1,2)	16	16	22	22	24	28	28	35	35
XC (±1) *	64	64	75	82	95	104	105	123	126
Y (±1,2)	21,5	21,5	27	27,5	32	36	36	44,5	44,5

STROKE TOLERANCE: until stroke 100 mm - 1,5, beyond + 2 mm.

Weight	stroke 0	55	60	80	100	175	240	365	610	790
gr.	every 10mm	6	7	5	5	8	11	15	19	21

Without rear eye version

Weight	stroke 0	50	55	75	95	170	230	345	570	750
gr.	every 10mm	6	7	5	5	8	11	15	19	21

Push/pull rod version

Weight	stroke 0	55	60	95	120	220	310	450	760	950
gr.	every 10mm	7	8	7	7	12	17	24	31	33

Hexagonal rod version

Weight	stroke 0	-	-	85	105	180	250	370	590	760
gr.	every 10mm	-	-	5	6	8	12	16	17	19

(*) These dimensions increase of 10 mm for microcylinders equipped with magnetic piston and spring return, and of 9 mm for microcylinders with 10 mm diameter magnetic piston